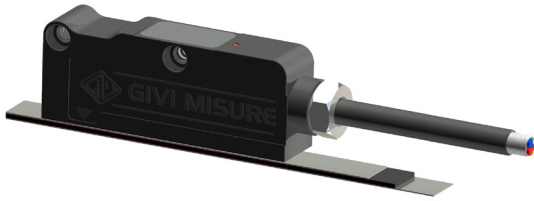


code **ST06** | project **A48-C** | release **B**

GENERAL FEATURES

- Magnetic sensor with direct reading of the absolute position.
- High-speed SSI - BiSS C (unidirectional) serial interface.
- Resolutions up to 1 μm and measuring length up to 30000 mm.
- Contactless reading.
- Status indication through LED RGBW.
- Extremely easy and fast mounting of the sensor and application of the magnetic band, with wide alignment tolerances.
- Small size, to allow installation in narrow spaces.
- Option: 1 Vpp analog signal.
- Axial or radial cable output.
- Magnetic band composed by a magnetized plastroferrite tape, with pole pitch 2+2 mm. The plastroferrite is supported by a stainless steel tape, already provided with the adhesive tape, for an easy application on the machine. To be used with magnetic band MP200A.

Cod. AGM-2

Pole pitch	2+2 mm
Incremental signal	sine wave 1 Vpp (optional)
Resolution 1 Vpp	up to 1 μm *
Signal period	2 mm
Serial interface	SSI - BiSS C (unidirectional)
Resolution absolute measure	500 - 100 - 50 - 10 - 5 - 1 μm
Accuracy grade	$\pm 10 \mu\text{m}$ **
Interpolation error (SDE)	$\pm 1.5 \mu\text{m}$ ***
Unidirectional repeatability	$\pm 0.5 \mu\text{m}$ ***
Hysteresis	2 μm ***
Measuring length ML	up to 30000 mm
Max. traversing speed	600 m/min
Vibration resistance (EN 60068-2-6)	200 m/s ² [55 ÷ 2000 Hz]
Protection class (EN 60529)	IP 67
Operating temperature	-20 °C ÷ 75 °C (serial) 0 °C ÷ 60 °C (serial + 1 Vpp)
Storage temperature	-40 °C ÷ 80 °C
Relative humidity	100%
Power supply	5 ÷ 24 Vdc $\pm 5\%$
Current consumption	200 mA _{MAX} (with R = 120 Ω) 5 Vdc 80 mA _{MAX} (with R = 1200 Ω) 24 Vdc
Max. cable length	20 m ****
Electrical connections	see related table
Electrical protections	inversion of polarity and short circuits
Weight	80 g

* Depending on CNC division factor.

** The declared accuracy grade of $\pm X \mu\text{m}$ is referred to a measuring length of 1 m.

*** The error declared is subject to the respect of the alignment tolerances.

**** Ensuring a minimum power supply of 5 V to the sensor, the maximum cable length can be extended to 50 m.

MECHANICAL CHARACTERISTICS

- Magnetic sensor with die-cast body.
- Possibility to fix the magnetic sensor with M4 screws or with through M3 screws.
- Wide alignment tolerances.
- Robust sealed cable exit.

ELECTRICAL CHARACTERISTICS

- Reading through positioning sensor based on magneto resistance, with AMR effect (Magnetic Anisotropy).
- Electrical protection against inversion of power supply polarity and short circuits on output ports.
- Option: 1 Vpp A and B output signals, with phase displacement of 90° (electrical).
- Serial protocol SSI - BiSS C (unidirectional).

- CABLE:
 - Shielded twisted pair for digital signals (SSI - BiSS).
 - PUR external sheath with low friction coefficient, resistant to oil and suitable for continuous movements.

SERIAL + ANALOG OUTPUT VERSION

- 10-wire shielded cable $\varnothing = 6.2 \text{ mm}$, PUR external sheath.
- Conductors section:
 - power supply 0.30 mm²;
 - signals 0.10 mm².

The cable's bending radius should not be lower than 80 mm.

SERIAL OUTPUT VERSION

- 6-wire shielded cable $\varnothing = 6.2 \text{ mm}$, PUR external sheath.
- Conductors section:
 - power supply 0.35 mm²;
 - signals 0.25 mm².


The cable's bending radius should not be lower than 70 mm.

SIGNALS	CONDUCTOR COLOR
+ V	Brown
0 V	White
CK	Green
$\overline{\text{CK}}$	Yellow
D	Pink
$\overline{\text{D}}$	Grey
SCH	Shield

code **ST06** | project **A48-C** | release **B**

OUTPUT SIGNALS


SSl Version

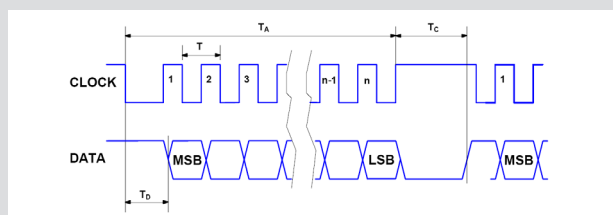

Interface	SSl Binary – Gray
Signals level	EIA RS 422
Clock frequency	0.2 ÷ 1.2 MHz* Duty cycle 50% ± 10%
n	position bit
Tc	max. 25 µs
Td	max. 7 µs


* The maximum frequency is guaranteed with a cable length up to 2 m.

BiSS C (unidirectional) Version

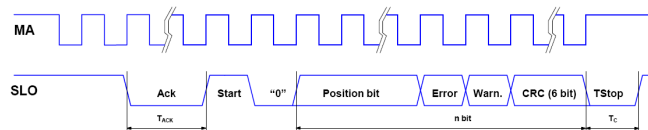

Interface	BiSS C unidirectional
Signals level	EIA RS 485 / RS 422
Clock frequency	0.4 ÷ 8 MHz* Duty cycle 50% ± 10%
n	26 + 2 + 6 bit
Tc	max. 25 µs
TACK	3 clock


CABLE

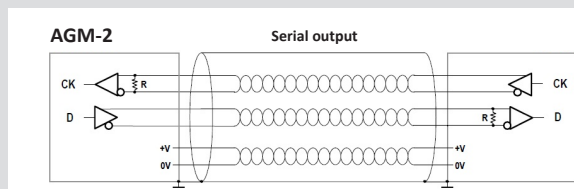

In case of cable extension, it is necessary to guarantee:

- the electrical connection between the body of the connectors and the cables shield;
- a minimum power supply voltage of 5 V to the sensor.

DIMENSIONS

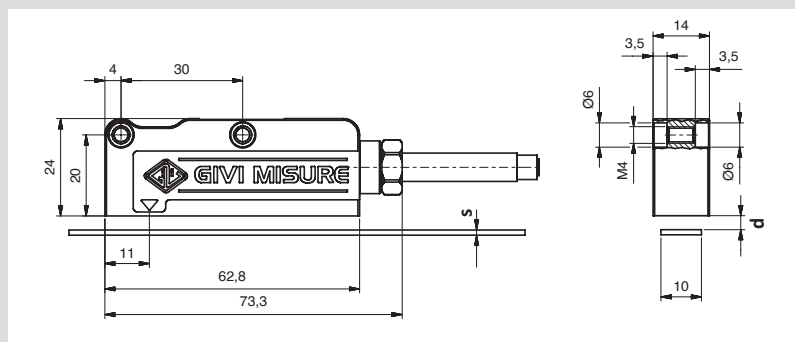


	MP200A	MP200A + CV103	MP200A + SP202
s (mm)	1.3	1.6	2.1
d (mm)	0.4 ÷ 1	0.7 _{MAX}	0.2 _{MAX}

s = thickness without double-sided tape. Thickness with double-sided tape + 0.1 mm.

d = distance to be maintained between sensor and surface of the magnetic band (or eventual cover/support).

ALIGNMENT TOLERANCES

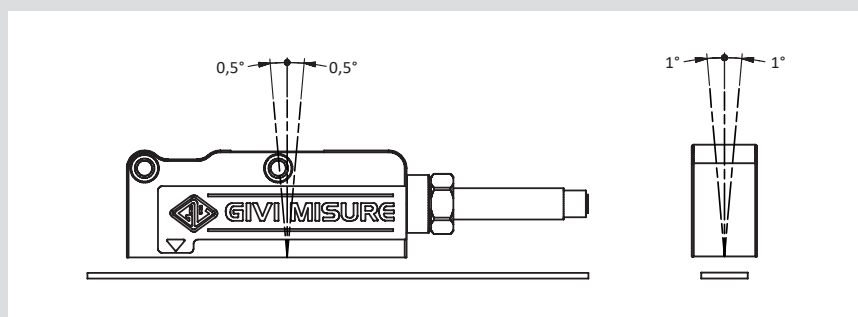

WARNING: Respect the maximum distance between the sensor and the magnetic band.


	AGM-2
a (mm)	0.5 _{MAX}

a = alignment tolerance

code **ST06** | project **A48-C** | release **B**


The following graphs show tests carried out in a metrological room under controlled climatic conditions: $T = 20\text{ °C} \pm 0.1\text{ °C}$ and $R.H. = 45 \div 55\%$. The reference system for the comparison of position measurements is interferometric with 1 nm resolution and equipped with an environmental compensation device. The sensor is installed according to the recommended mechanical configuration at a distance of 0.5 mm from the magnetic band.

ACCURACY

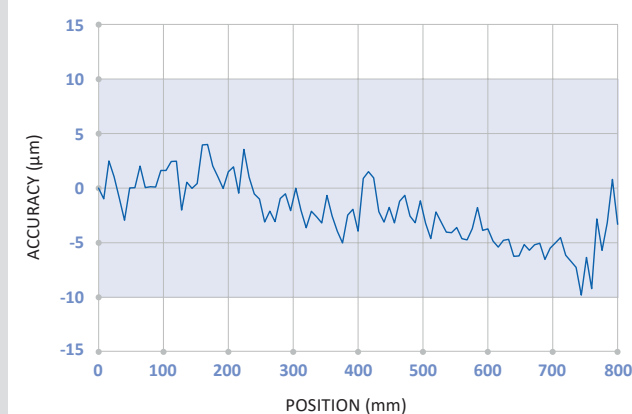


Accuracy graph: deviation between the value measured by the sensor and the value measured by the reference system.

INTERPOLATION - SDE

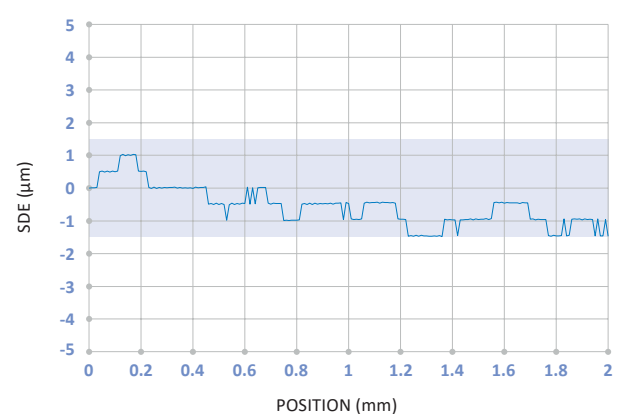

SDE (sub-division error) graph: accuracy of the interpolation device within the single pole pitch.


REPEATABILITY

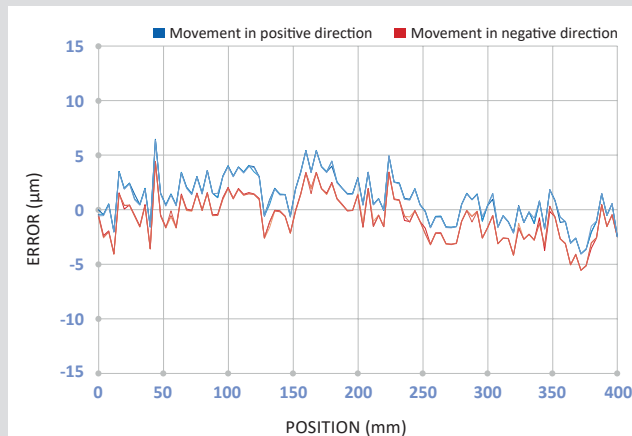

Repeatability graph obtained by carrying out the measurements several times in both directions of advancement.

- Unidirectional repeatability: measurement error detected without inverting the movement direction of the sensor.
- Hysteresis: difference in the measure due to the inversion of the sensor movement direction.

Verify the distance between the sensor and the magnetic band with the feeler gauge.

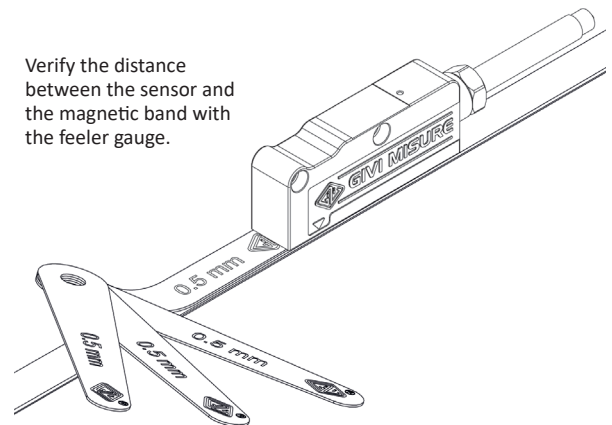

WARNING!

Make sure the tools used for assembly are rigorously demagnetized.

DO NOT TOUCH the cable terminals (or connector contacts) to avoid electrostatic discharges (ESD) on the device.



ORDERING CODE


Model	Pole pitch	Resolution	Cable output	Power supply	Output signals	Incremental signal	Cable length, cable type	Connector, wiring
AGM-2	M = 2+2 mm	500 = 500 μm 100 = 100 μm 50 = 50 μm 10 = 10 μm 5 = 5 μm 1 = 1 μm	A = axial R = radial	524V = 5 ÷ 24 V	S0 = SSI programmable S1 = SSI binary S2 = SSI binary+even parity S3 = SSI binary+odd parity S4 = SSI binary+error S5 = SSI binary+even parity+error S6 = SSI binary+odd parity+error S7 = SSI Gray B1 = BiSS binary	V = +1 Vpp No cod. = no increm. signal	Mnn = length in m M02 = 2 m 50 = 50 m S = PUR cable	SC = without connector Cnn = progressive

Example MAGNETIC SENSOR **AGM-2 M1A 524V S0 V M02/S SC**

Without prior notice, the products may be subject to modifications that the Manufacturer reserves to introduce as deemed necessary for their improvement.

WORLDWIDE BRANCHES AND SERVICE CENTERS

Our branches in China, India and Turkey are completely independent in providing a before and after sales service and a fast and qualified technical assistance.

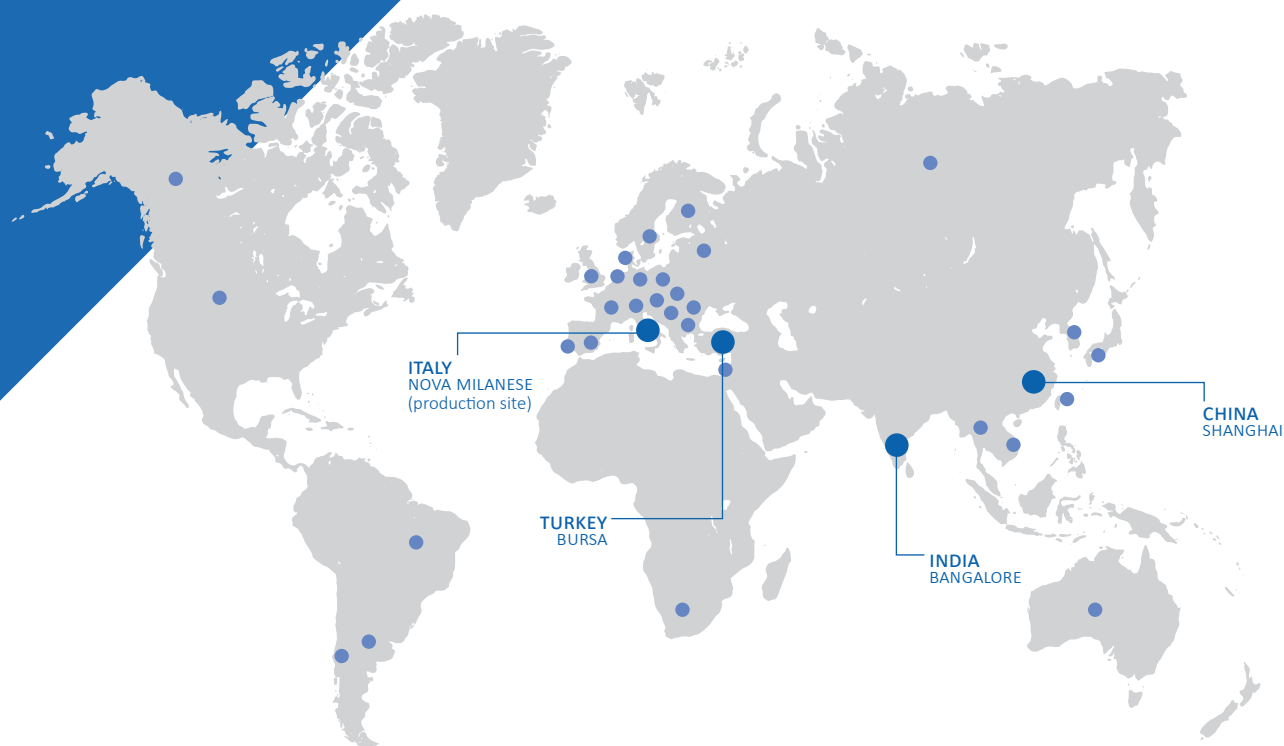

DISTRIBUTORS AND SERVICE CENTERS AROUND THE WORLD

- | | | | | |
|-------------|------------------|------------|----------------|-------------------|
| ● ARGENTINA | ● CHINA | ● HUNGARY | ● ROMANIA | ● SWITZERLAND |
| ● AUSTRALIA | ● CZECH REPUBLIC | ● INDIA | ● RUSSIA | ● TAIWAN |
| ● BELARUS | ● DENMARK | ● ISRAEL | ● SLOVAKIA | ● THAILAND |
| ● BRAZIL | ● FINLAND | ● ITALY | ● SOUTH AFRICA | ● THE NETHERLANDS |
| ● BULGARIA | ● FRANCE | ● JAPAN | ● SOUTH KOREA | ● TURKEY |
| ● CANADA | ● GERMANY | ● POLAND | ● SPAIN | ● USA |
| ● CHILE | ● GREAT BRITAIN | ● PORTUGAL | ● SWEDEN | ● VIETNAM |



Optical scales



Magnetic systems



Rotary encoders



Digital readouts



Position controllers



GIVI MISURE S.r.l. A SOCIO UNICO

Via Assunta, 57 - 20834 Nova Milanese (MB) - Italy
Tel.: +39 0362 366126 - Fax: +39 0362 366876
www.givimisure.it - info@givimisure.it

Applications

- | | |
|------------------------|--|
| ● CNC machines | ● Wood, glass and marble processing machines |
| ● Press brakes | ● Renewable energies |
| ● Traditional machines | ● Special applications |
| ● Automation | |